

## LND-10 – Emergency light



- △ For light during troubleshooting
- △ Automatic switch-on in case of power failure
- △ Ability to switch on manually
- △ Removable to serve as a hand lamp
- △ Can be placed in (wall) socket
- △ With selector switch
- △ 2hr autonomy

### General information

SEP Europe LND-10 is an emergency lighting unit that can easily be placed in a socket. As soon as the voltage drops, the LED turns on and there is light. Ideal to combine with a socket in the distribution board so that the fault can be quickly found. Handy for the corridor or passage way so that you can walk down the stairs with light during power failure. The unit can also be used as a hand held light, simply by unplugging it and taking it with you.

### LND-10 – Emergency light



Un	P	Autonomy	Battery life	Article no.	Type	EAN code	Pack.
230VAC	1W	2hr	4,5hr	2114120005	LND-10	8718959015724	1/6/120



### Certification marks



**General parameters**

Automatic switch on during power failure


**Electrical parameters**

Tested according	EN60598-1
Rated voltage	230VAC
Rated frequency	50/60Hz
Type of operation	Continuous / emergency
Manual operation	Yes
Mounting	(wall) socket (German / French style)
Light autonomy	2hrs
Lamp type	LED – 1W
Effective luminous flux	20lm (IEC 62722-2-1)
Battery charging time	6hrs
Battery time	4,5hrs
Battery cycles	500
Battery type	Ni-MH, 3,7V/90mAh
Ambient operational temperature	0°C + 40°C (daily average of <35°C)
Isolation material	PA66
Flammability class	V0
Colors	Grey

**Mechanical parameters**

Device width	44mm
Device height	45mm
Device depth	34mm (including outlet)
Mounting	wall) socket (German / French style)
Degree of protection	IP20
Storage temperature	-25°C + 70°C
Protection class	II
Weight	0,056 kg

**Dimension drawings**

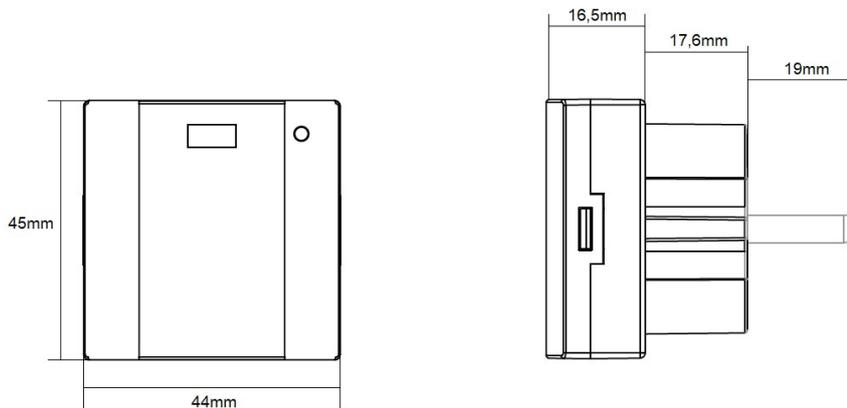

LND-10